



STREET SCENE EQUIPMENT, INC.

365 McCormick Avenue

Costa Mesa, Ca. 92626

Phone (714) 426-0590 Fax (714) 426-0591

950-70216

2004 CHEV COLORADO

&

2004 GMC CANYON

WIPER COWL

INSTALLATION INSTRUCTIONS

NOTE: Fit all parts before painting (See special instructions for paint Prep.) Parts that have been installed, prepped, or painted are not returnable.

FIT & DRILL PRIOR TO PAINT

For a professional installation take time and follow all instructions.


VERY IMPORTANT ! Read and understand all directions and check the following parts list before starting installation.

PARTS LIST					
1	Wiper Cowl	1	Instruction Sheet	1	Fiberglass Paint Prep Sheet
1	Street Scene Decal			2	Installation Clips # 71099
5 FT.	3/4" Wide Two Sided Tape			5	# 8 X 3/4" Washerhead Screws

TOOL LIST	
15 MM Socket, Pliers, Drill Motor, 1/8" Drill Bit, Flat Blade Screwdriver, Phillips Screwdriver, Scissors, Ratchet	

1. Pry off wiper arm nut covers. Flip wiper arms up. Use a 15 MM socket and remove the nuts retaining the wiper arms. Remove wiper arms.
2. Open hood. Remove the six push in fasteners on the forward edge of the OEM wiper cowl.
3. Remove the four 15 MM head bolts securing the hood. Remove hood (NOTE: Hood has self aligning bolts).
4. Grasp OEM wiper cowl and pull upward to " Un-Snap " the retainers securing it to the fire wall. Lift the passenger corner of cowl and unplug washer hose. Remove cowl.
5. Remove the rubber hood seal from cowl. Remove the plastic retainers from back side of hood seal. Clean the back of hood seal with alcohol. Install the two sided tape to rubber seal. Trim off excess on each end. Set rubber seal aside for use in step 11.
6. Slide wiper cowl under hood hinge and over the wiper studs. Align wiper cowl as best as possible at this time. Use the two clips provided and " Clip " the wiper cowl to the fire wall. Install clips with the flat side up approximately two inches from each end.
7. Install hood on vehicle. Align wiper cowl and close hood. Align wiper cowl again. (NOTE: Corners will come down when fastened). After you are happy with fitment remove hood. Drill five 1/8" holes as shown in illustration and secure with screws provided.

ILLUSTRATION

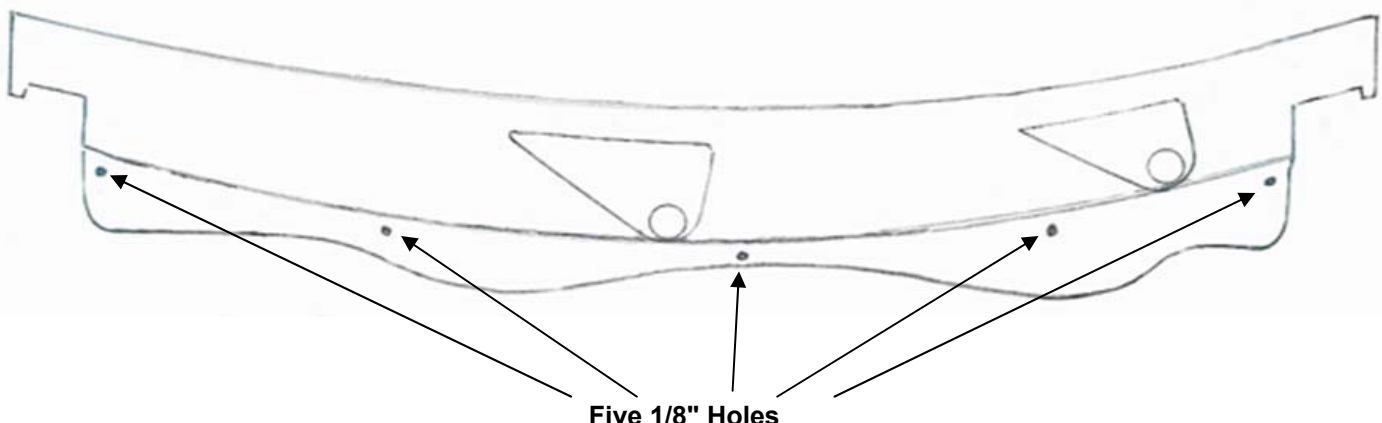

8. Remove wiper cowl at this time and paint to match.
9. Remove the washer hoses from from washer nozzels on OEM wiper cowl. Pinch the sides of nozzel together and remove washer nozzel. Install washer nozzels on SS wiper cowl. Install hoses to nozzels.
10. Install wiper cowl to vehicle. Lift up passenger side and connect washer hose. Secure wiper cowl to fire wall through holes drilled in step 7 and secure with screws.
11. Remove the tape backing on hood seal rubber and install hood seal to the front most edge of wiper cowl. Make sure to install the rubber seal with the correct direction.
12. Install wiper arms to wiper shafts. Tighten nuts securely and install nut covers. (Arm with air deflector goes on driver's side).
13. Install hood. We advise setting a towel at each corner to protect paint when installing.
14. If you have followed instructions completely you will have no fitment problems. But if you took short cuts, Good Luck.