



STREET SCENE EQUIPMENT, INC.

365 McCormick Avenue
Costa Mesa, Ca. 92626
Phone (714) 426-0590 Fax (714) 426-0591

950-70934
2006 - 2008
DODGE CHARGER
REAR WING
3 PC SET

INSTALLATION INSTRUCTIONS

Pre-fit all pieces to the vehicle. Once you are assured you have the right body styling kit you may proceed. If uncertain call SSE to double check part number with your application. We highly recommend using masking tape anywhere the body kit will be touching the vehicle body to prevent scratches during pre-fit. Do any sanding, filing, necessary (BEFORE PAINTING) for a clean tight fit.

NOTE: Parts that have been drilled, installed, or painted are not returnable.

NOTE:

Check fit all body parts PRIOR to paint. Follow fiberglass prep instructions before painting. Take your time and pre-fit all pieces so that they will have a tight fit to the body.


VERY IMPORTANT ! Read and understand all directions and check the following parts list before starting installation.

PARTS LIST					
1	Rear Wing 3 PC Set	1	Instruction Sheet	18 FT	1/2" Wide Double Sided Tape
6	Adhesion Promoter	1	Fiberglass Prep Sheet	1	Deck Lid Drill Template
1	Street SceneDecal			1	RT QT Drill Template
2	1/4-20 X 1/2" Flange Head Serrated Screws # 00931			1	LT QT Drill Template
4	1/4-20 X 5/8" Flange Head Serrated Screws # 00932				


TOOL LIST

Drill Motor, Center Punch, 11/32 Drill Bit, Masking Tape, Scissors

1. Cut out the drill templates on the black line.
2. Set the templates on vehicle as shown in photos below.

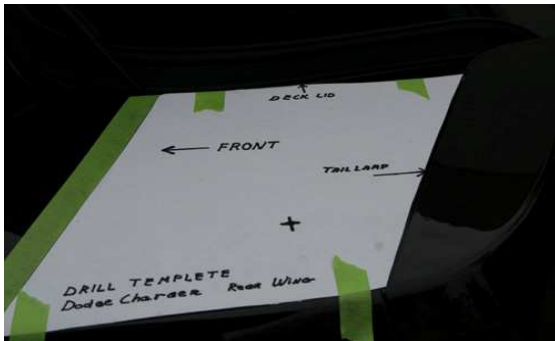

3. Tape template into position and center punch where marked. Drill holes to 11/32". Be careful at trunk rear.

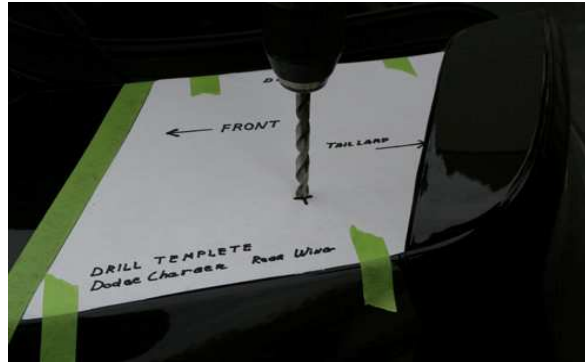

4. Set the center wing on deck lid. Use the four 1/4-20 X 5/8" (longer bolts) and fasten wing to deck lid. If needed enlarge drilled holes.
5. Do the same on the fender sections. On the fender section use **ONLY** the 1/4-20 X 1/2" bolts (shorter ones) If the longer bolts are used damage will occur to the parts.
6. Remove all pieces.
7. After the wing has been pre-fitted prepped and painted the double sided tape should be applied to the indentation on the inside of each piece. This surface has to be clean and dry for the tape to properly adhere. Wipe the tape surface with the adhesion promoter. When applying tape make sure that tape is smooth and wrinkle free.
8. The surface of the vehicle should also be preped in the same manner.
9. Place the spoiler gently on the vehicle and make sure you have it position correcting by installing the screws a few threads. Once you are certain hold into position and pull the tabs you created while applying light downward pressure. Continue this taking care not to tear off the tabs by pulling too hard. After all the film is removed apply firm pressure all around to insure the tape has bonded properly. Tighten bolts securely.