



STREET SCENE EQUIPMENT, INC.

365 McCormick Avenue
Costa Mesa, Ca. 92626

Phone (714) 426-0590 Fax (714) 426-0591

INSTALLATION INSTRUCTIONS

950-77188 SATIN FINISH
950-78188 CHROME FINISH
950-79188 STAINLESS STEEL
2007
GMC H.D.
SPEED GRILLE INSERT

VERY IMPORTANT ! Read and understand all directions and check the following parts list before starting installation.

PARTS LIST					
1	Speed Grille Insert	1	Instruction Sheet	4	Upper Mounting Brackets # 66180
		1	Street Scene Emblem	4	S/S Thru Head Screws # 70956
8	# 6 X 1/2" Screws # 06050			4	Black Retainer Nut # 11719
6	Installation Clips # 71092			1 FT	Double Side Tape (1/2" Wide)
1	Care For Grilles				

TOOL LIST
Panel Removal Tool, 10MM Wrench, # 1 Phillips Screwdriver, @ 2 Phillips Screwdriver

1. Remove the radiator air deflector panel over the grille shell, by removing the eight plastic retaining fasteners across the top.
2. Remove the four fasteners securing the grille shell to the core support. Grasp the grille shell and pull to release the six snap-in fasteners securing the grille shell to vehicle.
3. Set the grille shell face down on a covered bench or table. Remove the GMC logo by depressing the tabs.
4. Assemble the four mounting brackets as shown in the photo below.

PHOTO 1



5. Install the Speed Grille insert over the existing black grids on grille shell.


THE SPEED GRILLE™ may be covered by one or more of the following U.S. Patents: D427,119,D425,834,D421,585,D420,961,D420,960,D420,959, and D420,958 may be covered by one or more pending U.S. Patent applications.

07/26/07 SSE 950-77188 & 950-78188 & 950-79188

6. Clip the bottom side using the six installation clips provided. The photo below shows where to place the clips and the close will show you how to install the clips.

PHOTO 2

PHOTO 3

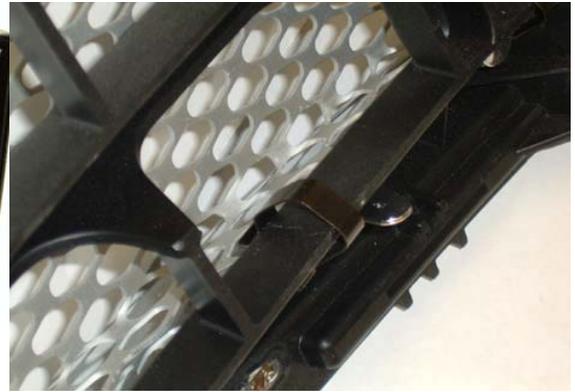

SIX CLIPS

7. The top of the Speed Grille will attach using the four mounting brackets assemble in step four.
8. Using the four large stainless steel thru head screws provided, Attach the mounting brackets to the top of Speed Grille as shown in the photo below. Install all four brackets as located in photo.


PHOTO 4



FOUR STAINLESS STEEL SCREWS


9. Push the top of Speed Grille back and attach the brackets to the top of grille shell using the eight self drilling phillips head screws provided. Push down ward to start screw. See photo below.

PHOTO 5

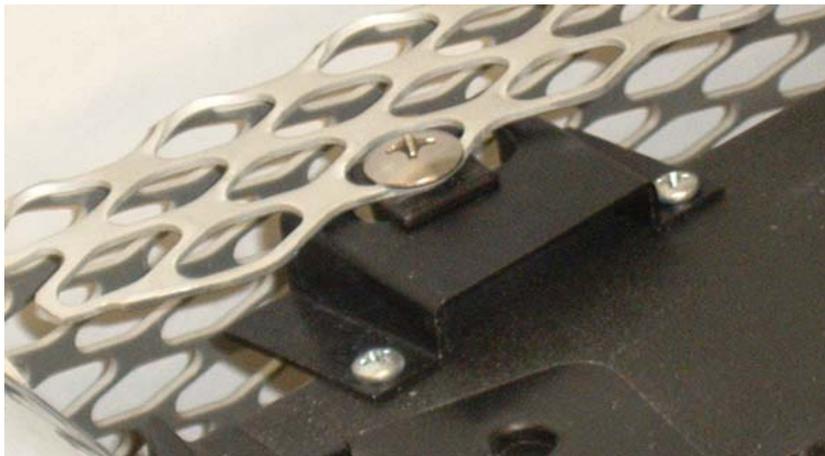

10. If you would like to install the GMC emblem cut or grind off the mounting tabs on back side. Apply the two sided tape provided as show in photo below.

PHOTO 6

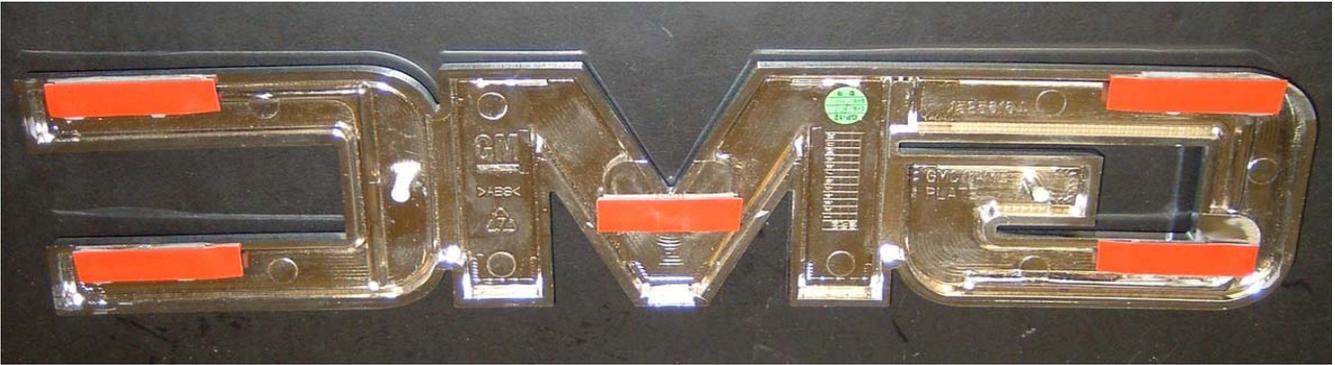

11. Place the GMC emblem on grille shell over the GMC silhouette beneath the Speed grille. Apply pressure over emblem.
12. Install the grille shell back on vehicle by inserting the mounting fasteners into the slotted holes in the core support. Snap into place.
13. Install the top cover.