



## STREET SCENE EQUIPMENT, INC.

365 McCormick Avenue

Costa Mesa, CA. 92626

Phone (714) 426-0590 Fax (714) 426-0591

### INSTALLATION INSTRUCTIONS

950-77510 SATIN FINISH

&

950-78510 CHROME FINISH

SPEED GRILLE

1999-2001 DODGE RAM

"SPORT"

MAIN GRILLE

**VERY IMPORTANT !** Read and understand all directions and check the following parts list before starting installation.

#### PARTS LIST

4	Speed Grille Sections	1	Instruction Sheet	32	Attaching Clips # 71097
		1	Street Scene Emblem		


#### TOOL LIST

Safety Glasses

#### NOTE:

Safety Glasses, 8 mm Socket, Ratchet, Extension, Grinder, Drill, File Or Other Tool To Remove The Plastic Rivets That Retain The Stock "Honeycomb" Grille.

1. Before beginning installation be sure to wear proper eye protection.
2. Remove the grille shell from the vehicle. Open the hood and remove the six 8 mm nuts that secure the grille shell across the top of the hood, the two 8 mm bolts on each side of the grille and the single 8 mm bolt at the bottom of the grille just above the hood safety latch. Save the fasteners for re-installation later. Leave the metal tube grille support frame in place.
3. To remove the stock mesh grille, lay the grille shell face down on a surface that won't damage it. Remove the ends of the plastic rivets that retain the mesh grille by grinding or filing, then remove the stock grille mesh.
4. Each Speed Grille Section is labeled for a grille opening. Install them one at a time from the front and secure each section with eight clips. The clips install from the back of the grille with the raised side of the clips facing to the inside of the grille opening.
5. Make sure the Speed Grille sections are properly aligned and securely fastened then reinstall the grille shell on the vehicle with the original fasteners.

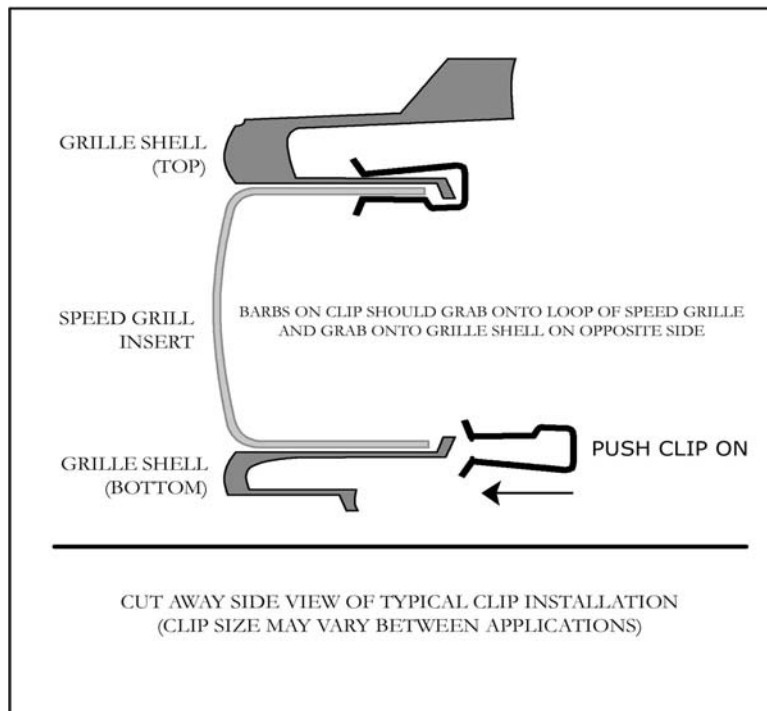

THE SPEED GRILLE™ may be covered by one or more of the following U.S. Patents: D427,119, D425,834, D421,585, D420,961, D420,960, D420,959, and D420,958 may be covered by one or more pending U.S. Patent applications.

6/11/01 SSE 950-77510 & 950-78510