



STREET SCENE EQUIPMENT, INC.

365 McCormick Avenue

Costa Mesa, Ca. 92626

Phone (714) 426-0590 Fax (714) 426-0591

950-77930

STREET SCENE GRILLE

1994-1997

BEFORE 7-97 BUILD DATE

FORD MUSTANG

MAIN GRILLE

INSTALLATION INSTRUCTIONS

VERY IMPORTANT ! Read and understand all directions and check the following parts list before starting installation. Installation time for is about 1 hour.

PARTS LIST					
1	Speed Grille Insert	1	Instruction Sheet	5	Black Washerhead Phillips Screws
5	Attaching Clips # 71098	1	Street Scene Decal	1	Got Street Scene Decal
2	7/16" Cable Clamps	2	3/16" Cable Clamps	1	Hood Release Lever Bracket
3	# 8 Nyloc Nuts	6	# 8 Flat Washers	1	Pull Cable Assembly
		1	" L " Bracket	3	# 8 X 1/2" Phillips Machine Screws

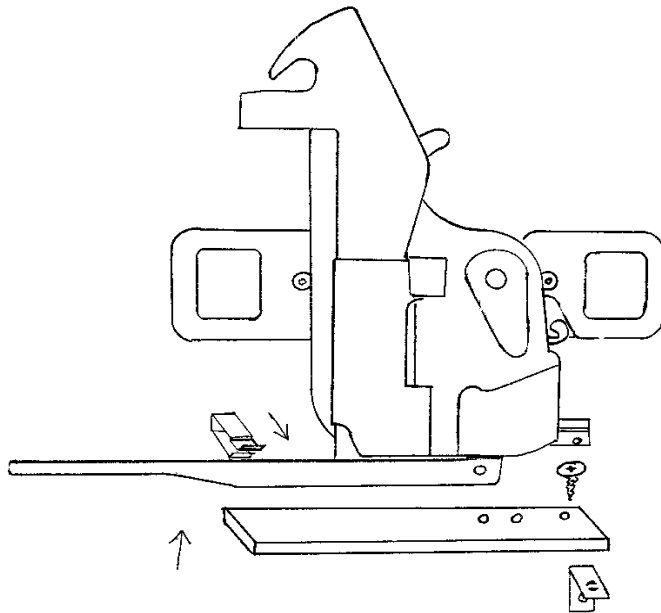
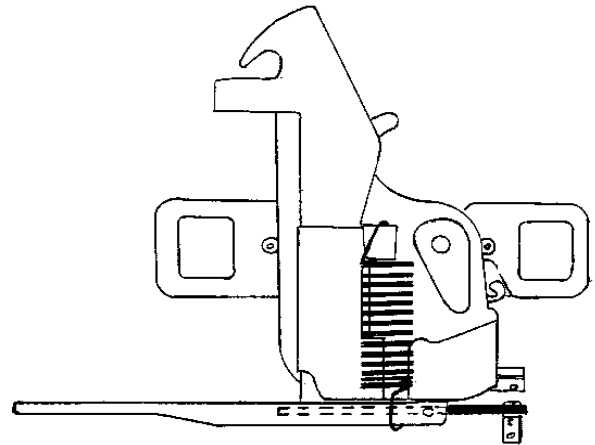
TOOL LIST	
Long Blade Phillips Head Screwdriver, 1/4" Socket, Ratchet, 3/8" wrench, Allen Wrench Set	

SPECIAL NOTE :

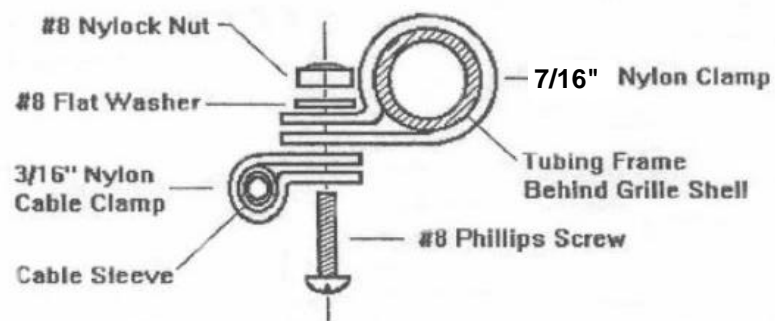
There are two types of hood release latches that were installed on the 1994 thru 1998 mustang. Type I was installed on the 1994 thru 1997 until the 7-97 build date. After that date type II were installed. The difference is that after 7-97 used a secondary manual release above the grille opening which operates right to left. Before 7-97 the secondary release lever is operated through the grille opening which operates up and down. In that case the remote secondary hood release must be installed before installing the Speed Grille.

INSTALLATION INSTRUCTIONS

1. Open hood. Remove the Mustang emblem. If you like you can remove the emblem and install it to the Speed Grille before installing.
2. Remove the hood release latch. Install the " L " bracket to the flat bar at the hole at the end. Refer to illustration A. Remove the spring from the hood release latch place the flat bar under the hood release lever, aligning the hole with the hole in the lever. Refer to illustration A and install the spring clip over the release lever and over the flat bar. Hook one end of the spring into the hole in the bar and into the lever and the other end over the spring attachment point on the hood release latch, Refer to illustration B.

ILLUSTRATION A**ILLUSTRATION B**

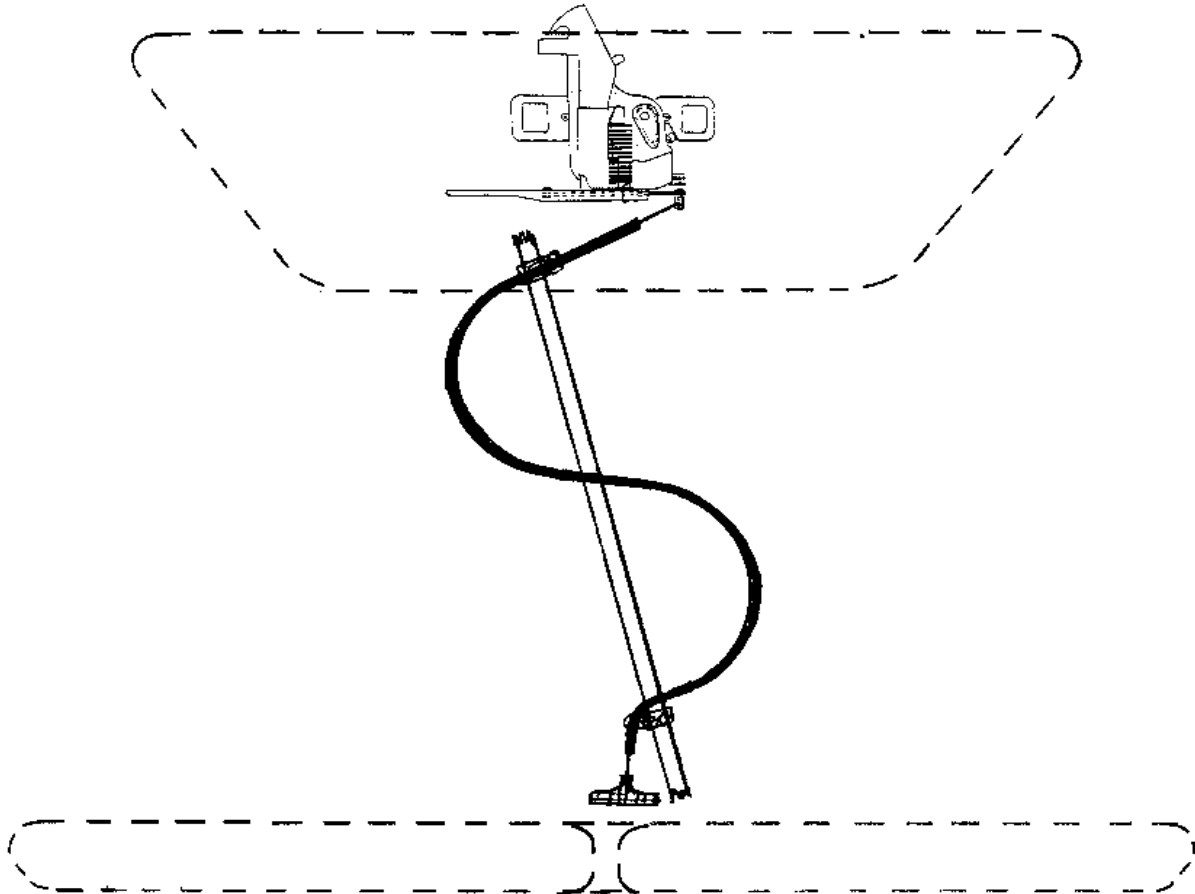
3. Attach the cable clamps to the release cable at each end. Refer to illustration " C " for detail assemble. Attach the cable assemble to the hood release latch assemble with the # 8 phillips head screw, washer and nut.

CABLE CLAMPING ASSEMBLY ILLUSTRATION " C "

To assemble, first snap the clamps over the cable & tubing. Squeeze the clamps together to insert the #8 screw. Route cable, then tighten.

4. Route the cable assemble refering to illustration " D ". Adjust clamps for proper operation.

ILLUSTRATION " D "



5. Attach hood release latch, check for proper operation **BEFORE** installing the Speed Grille.

INSTALLING SPEED GRILLE

6. Remove the Speed Grille from it's package. Place the Speed Grille into the opening and check positioning. Speed Grille will set on top of the core support. Using the four screws provided screw through the grille opening and into the urethane body panel. Attach the top to the core support using the clips with the curved side facing up.