



# STREET SCENE EQUIPMENT, INC.

365 McCormick Avenue

Costa Mesa, Ca. 92626

Phone (714) 426-0590 Fax (714) 426-0591

## INSTALLATION INSTRUCTIONS

950-76608 BLACK CHROME

&

950-77608 SATIN FINISH

&

950-78608 CHROME FINISH

2005 - 2006

DODGE DAKOTA

MAIN GRILLE

**VERY IMPORTANT !** Read and understand all directions and check the following parts list before starting installation.

### PARTS LIST

1	RH Speed Grille Insert - Top	1	Instruction Sheet
1	LH Speed Grille Insert - Top	1	Street Scene Emblem
1	RH Speed Grille Insert - Bottom	2	5/8" Tubing Clamps
1	LH Speed Grille Insert - Bottom	12	Installation Clips # 71098 ( Longer Clips )
2	8/32" X 3/4" Bolt	12	Installation Clips # 71093 ( Shorter & Fatter Clips )
2	# 8 Flat Washers	1	6/32 X 3/4" Bolt
1	Black Nylon Spacer	1	6/32 Nyloc Nut
1	Hood Latch Cable ( 14" ) # 74603	2	8/32 Nyloc Nuts
2	3/16" "P" Cable Clamp		

### TOOL LIST

Phillips Screwdriver, Flat Blade Screwdriver, Ratchet, Extension, 10MM Socket, 8MM Socket  
5/16" Wrench, 11/32" Wrench. 7/16" Wrench


### A: REMOVING GRILLE FROM VEHICLE

1. Remove the six bolts on the bottom side of grille attaching the shell to the tubular grille frame. Save hardware.
2. Remove the six nuts retaining the grille shell to the hood and remove from vehicle. Save hardware.
3. Set the grille on a protective covered table or bench.
4. Remove the plastic grilles from grille shell by depressing the chrome tabs on grille shell while pulling on the plastic grilles. DO the same on both halves.

### B: INSTALLING SPEED GRILLE INSERTS

1. Each Speed Grille insert is marked for it's location.
2. Insert Speed Grilles one at a time into their respective opening. Attach from back side with the attaching clips provided. You will find two different type of clips in the installation kit. The 71093 wider clips and the 71098 clips are used on the top sides of all grilles.
3. Look at the Photo below to see the placement of all clips. Install clips as shown in photo. The clips do not need to be installed as far as they can go in, but only as far in to hold grille inserts flush with back of grille shell.


PHOTO I

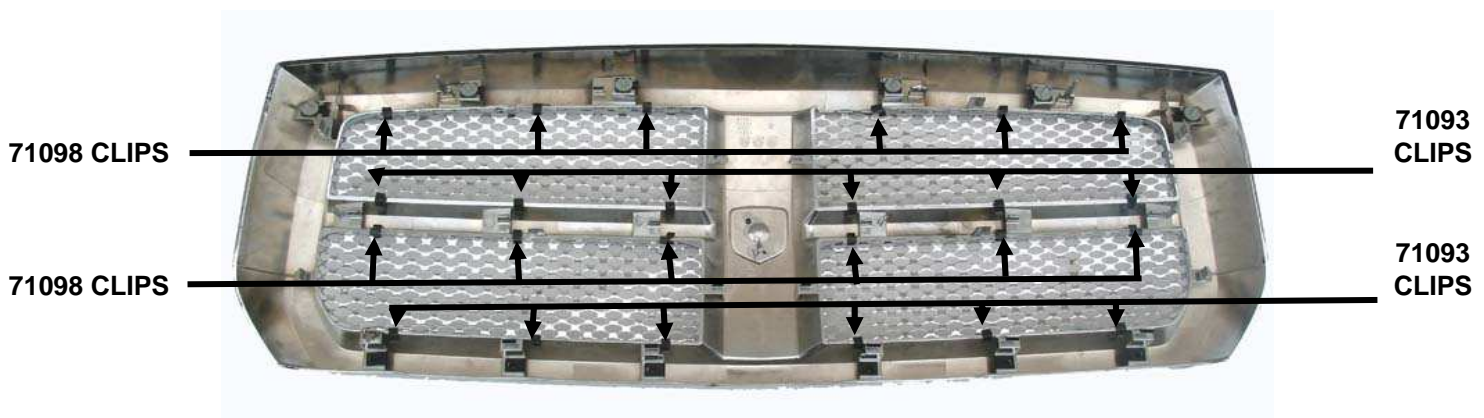

THE SPEED GRILLE™ may be covered by one or more of the following U.S. Patents: D427,119,D425,834,D421,585,D420,961,D420,960,D420,959, and D420,958 may be covered by one or more pending U.S. Patent applications.

4. To the right you will see the proper way of installing the clips to Speed Grille and grille shell. Please note that the "humped" side goes on the Speed Grille Side.
5. Install all Speed Grille inserts into Grille Shell. DO NOT install grille shell back into vehicle at this time. The secondary release assemble must be installed first.

#### TYPICAL CLIP INSTALLATION

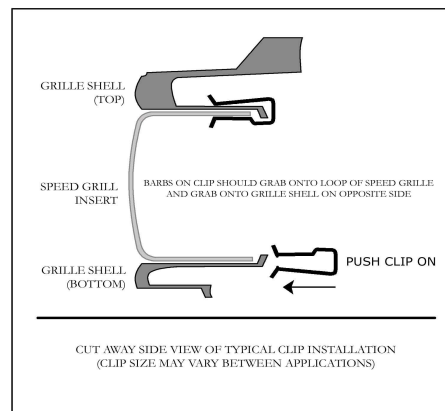

### C: INSTALLING REMOTE SECONDARY HOOD RELEASE

1. The remote secondary hood release consist of a cable assemble, " P " clamps and hardware as listed in the parts supplied. Take your time amd make sure of this operation.

**PHOTO II**




2. Look at the above photo and install the cable assemble as shown.
3. Start by first installing the cable to the latch. Insert the 6/32 screw through the eye in cable and then into the black spacer and finally through the hole in latch. Install the 6/32 nut and tighten so that the cable will still rotate on screw. See photo III and drawing below.

**PHOTO III**




**DRAWING A**

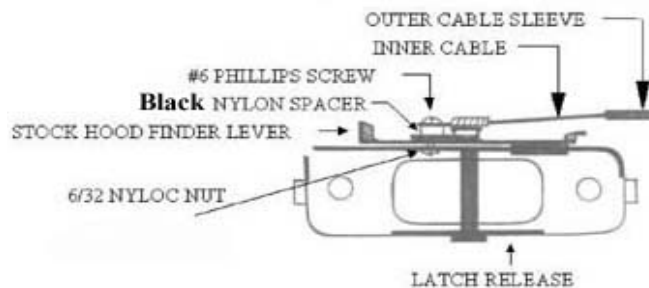

SECONDARY HOOD LATCH ASSEMBLY VIEWED FROM THE BOTTOM

**DRAWING B**  
**DRAWING B**  
**CABLE CLAMPING ASSEMBLY ILLUSTRATION**

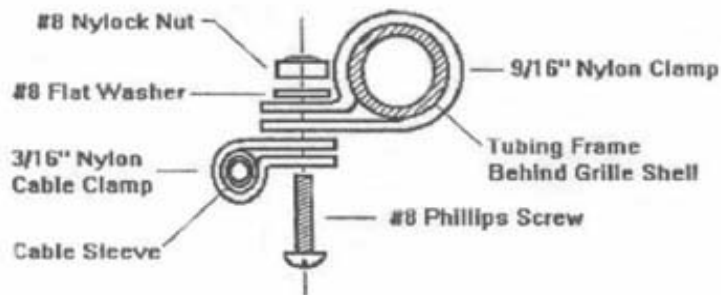

To assemble, first snap the clamps over the cable & tubing. Squeeze the clamps together to insert the #8 screw. Route cable, then tighten.

4. Attach the cable housing to the center tubular bar on the grille frame. See photo II for reference. Look at drawing B for the method of installation. Pull the cable housing down so that there is a minimum of 1/4" free play in cable.
5. At this time close the hood and latch. Release hood from inside of vehicle. Pull on the " T " handle to release the secondary latch and open hood. If latch does not release re-adjust. MAKE SURE that this works properly before proceeding with the next installing procedure.

**D: INSTALLING GRILLE SHELL BACK ON VEHICLE**

1. Install the grille shell complete with Speed Grille insert back onto vehicle. Use all attaching hardware removed in step A, one & two.
2. Adjust " T " handle so it is parallel with grille shell. Tighten nut on cable housing.